


VCL 2/34 Mbps E3, Multiplexer

SCADA Application using VCL 2/34 Mbps E3, Multiplexer and OLTE (with 1+1 Protection)

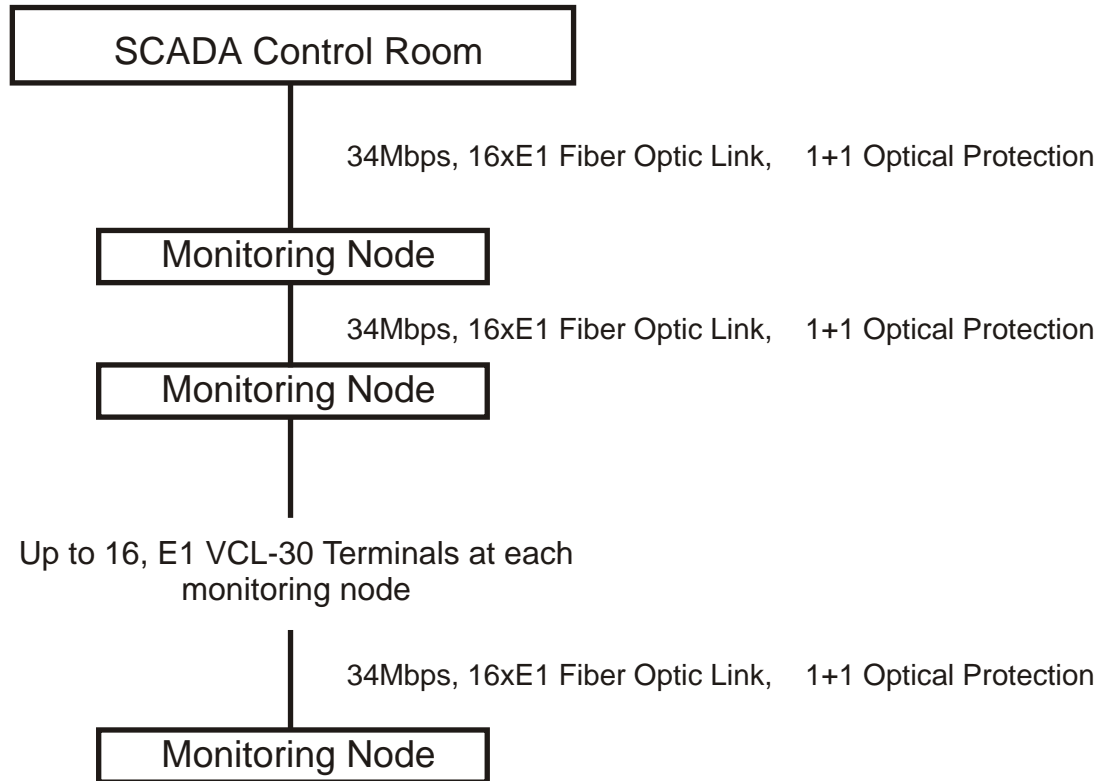

Services

Voice: FXO, FXS (Including Ring-Down/Hot-Line), 2W E&M, 4W E&M

Data: V.35 (Sync @ 64Kbps), V.35 (Sync @ "n" x 64Kbps), V.24 (Async. 300bps to 19.2Kbps), G.703 @ 64Kbps